

Wie bitte?

SELECT
FROM

count(bis)
managed

count
bigint
1

W
NULL

SELECT
FROM

count(*)
managed

count
bigint
4



managed			
<u>seniorid</u>	<u>fotographid</u>	<u>von</u>	<u>bis</u>
integer	integer	date	date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	

Wie bitte? ?

SELECT

count(*)

FROM

managed

WHERE

bis > now() OR bis <= now()



count
1

SELECT

count(*)


FROM

managed

count
4

managed			
<u>seniorid</u>	<u>fotographid</u>	<u>von</u>	<u>bis</u>
integer	integer	date	date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	

SELECT bis, count(*)
 FROM managed
 GROUP BY bis

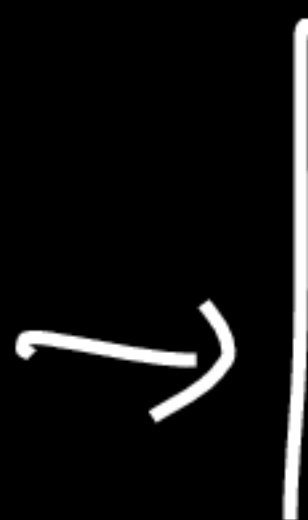

bis date	count bigint
	3
2013-03-31	1

SELECT bis, count(*)
 FROM managed
 GROUP BY bis
 HAVING bis > now() OR bis <= now()

bis date	count bigint
2013-03-31	1



managed			
<u>seniorid</u> integer	<u>fotographid</u> integer	<u>von</u> date	bis date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	

Wie bitte? ? ?

SELECT

count(*)

FROM

managed

WHERE

bis = NULL



count
bigint
0

SELECT

count(*)

FROM

managed

WHERE

bis != NULL

count
bigint
0

managed			
<u>seniorid</u> integer	<u>fotographid</u> integer	<u>von</u> date	<u>bis</u> date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	

not	
true	false
unknown	unknown
false	true

and	true	unknown	false
true	true ✓	unknown ✓	false ✓
unknown	<u>unknown</u> ✓	unknown ✓	<u>false</u> ✓
false	false ✓	<u>false</u> ✓	false ✓

or	true	unknown	false
true	true ✓	true ✓	true ✓
unknown	true ✓	<u>unknown</u> ✓	unknown ✓
false	true ✓	unknown ✓	false ✓

Wie bitte? ?

SELECT

count(*)

FROM

managed

WHERE

bis > now() OR bis <= now()

UNKNOWN

count
bigint
1



managed			
<u>seniorid</u>	<u>fotographid</u>	<u>von</u>	<u>bis</u>
integer	integer	date	date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	



IS NULL

SELECT count(*)
FROM managed
WHERE bis IS NULL

count
bigint
3

~~bis = NULL~~

SELECT count(*)
FROM managed
WHERE bis IS NOT NULL

count
bigint
1

managed			
<u>seniorid</u>	<u>fotographid</u>	<u>von</u>	<u>bis</u>
integer	integer	date	date
1	3	2013-01-01	
2	6	2012-09-01	2013-03-31
1	6	2013-04-01	
2	7	2013-01-01	